


Order Code:

- White [RAL 9010] 71034
- Black [RAL 9005] 71035
- Custom Finishes Available on Request

Optional Extras (specify when ordering):

- DMX512** DMX Control Conversion 11711
- ∞ Sequencing Conversion 11733

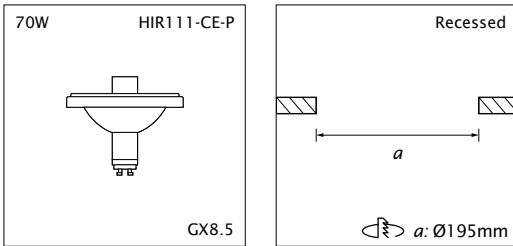

Construction

Mild steel enclosed fixture, powder coated; Mild steel mounting ring

Mounting

Recessed¹ (trimless); Plaster up to rim

Lamp Type

HIR111-CE-P²

Lamp Power

70W

Beam Width

10° - 40°, Lamp dependant

Voltage

220-240V; 50/60Hz³

Ballast

External 70W (on power pack)

Dimming

Not currently available for metal halide lamps⁴

Place of Use

Interior use only

Min. Ceiling Clearance

(w)400 x (l)400 x (h)200mm

Max. Ceiling Thickness

20mm

Ceiling Cutout

Ø195mm

Movement

360° Pan; +/- 30° Tilt

Finish

White RAL 9010, Black RAL 9005

Weight

Luminaire - 3.2kg (including lamp); Pack - 1.4kg



Sequencing

Available (11733)

Control Options

1. Handheld remote (11400)
2. DMX (11711)

DMX requires setup (with additional costs) and must be specified when ordering.

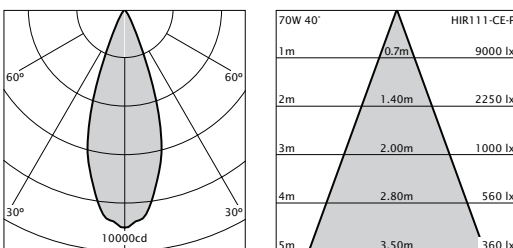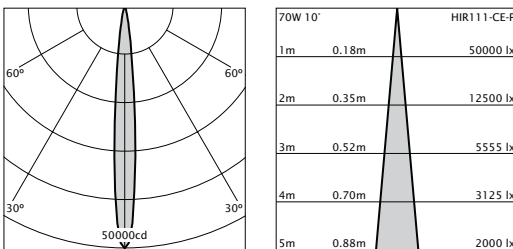

Notes

- ¹Luminaire is fixed in place using trimless mounting ring and must be installed before plastering.
- ²HCI-R111 lamp preferred.
- ³50Hz as standard. For 60Hz, specify when ordering.
- ⁴Luminaire can be switched on/off.

If you are in doubt as to the suitability or compatibility of this product, contact RCL.

Photometric data is provided as a guide only. Check with lamp manufacturers for latest data.

