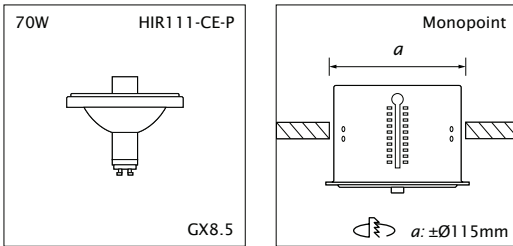

**Order Code:**

- White [RAL 9010] **81037**
- Black [RAL 9005] **81038**

**Optional Extras (specify when ordering):**

- DMX<sup>512</sup>** DMX Control Conversion **11811**
- DALI** DALI Control Conversion **11822**
- ∞ Sequencing Conversion **11833**


**Construction**

Die-cast aluminium lamp housing, powder coated;  
Injection molded plastic housing

**Mounting**

Monopoint<sup>1</sup>  
HIR111-CE-P

**Lamp Type**

70W

**Lamp Power**

10° - 40°, lamp dependant

**Beam Width**

220-240V; 50/60Hz<sup>2</sup>

**Voltage**
**Ballast**

External 70W included<sup>3</sup>

**Dimming**

Not currently available for metal halide lamps<sup>4</sup>

**Place of Use**

Interior use only

**Min. Ceiling Clearance**

200mm

**Max. Ceiling Thickness**

50mm

**Ceiling Cutout**

±Ø115mm

**Movement**

360° Pan; +/- 90° Tilt

**Finish**

White RAL 9010, Black RAL 9005

**Weight**

Luminaire - 2.8kg (including lamp); Ballast - 0.3kg

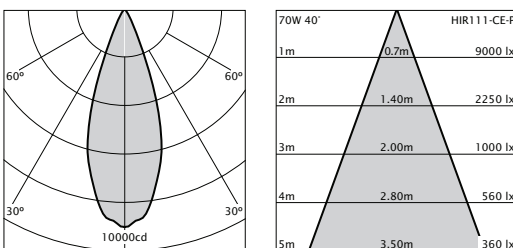
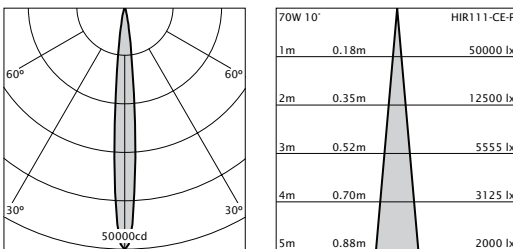
**Sequencing**

Available (11833)

**Control Options**

1. Handheld remote (11400)
2. DMX (11811)
3. DALI (11822)

DMX or DALI requires setup (with additional costs) and must be specified when ordering.


**Notes**

<sup>1</sup>Monopoint fixed in place using mounting ring.

<sup>2</sup>50Hz as standard. For 60Hz, specify when ordering.

<sup>3</sup>Ballast located in plenum space.

<sup>4</sup>Luminaire can be switched on/off.

If you are in doubt as to the suitability or compatibility of this product, contact RCL.

